

INDUSTRIAL VALVE & ENGINEERING SUPPLIES VALVE & ENGINEERING MERCHANT COMPANY

BMC
VALVE

Break Away
Brand Valves


FIG 7520

DIAPHRAGM VALVE SCR



SIZE	WEIGHT
20MM	0.9KG

TEST PRESSURE		
SIZES	BODY	SEAT
15/20MM	24KG/CM2	16KG/CM2

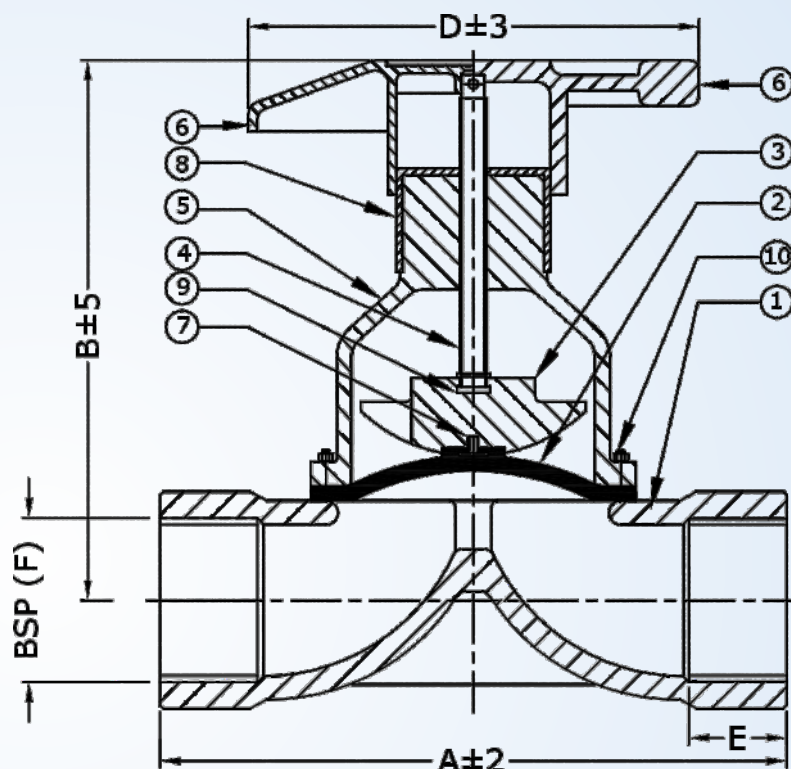

DIMENSIONS		
DN	15	20
A	65	84
B	85	99
D	62	62
E	9.5	12.5

MATERIAL SPECIFICATION		
SN.	COMPONENT	MATERIAL
1	BODY	ASTM A 395 (DUCTILE IRON)
2	DIAPHRAGM	EPDM
3	COMPRESSOR	ASTM A 216 Gr. WCB
4	SPINDLE	M.S.
5	BONNET	CAST IRON CASTING
6	HANDWHEEL	ABS PLASTIC
7	STUD.	Brass.
8	INDICATOR	P.P
9	THURSTDISK	NYLON
10	FASTENER	HI-TENSILE

TECHNICAL DATA

- MFG. STD: BS5156
MFG. STD: Revised.
BS EN 13397 : 2002.
- INSP & TEST STD: BS: 5146
- PRESSURE RATING: PN16
- END CONNECTION ASME B16.11

All Specifications are subject to change without notice

Head Office:

+27-11-394-2066 (21 Lines)
sales@industrialvalve.co.za
www.industrialvalve.co.za
114 Plane Road
Spartan
Gauteng
South Africa

KZN Branch:

+27-31-205-0218
laven@industrialvalve.co.za
www.industrialvalve.co.za
Unit No 16 5-29
Eaton Road
Congella
Durban

Cape Town Branch:

+27-21-982-0302
ivesct@industrialvalve.co.za
www.industrialvalve.co.za
Unit 14 Silver Park
Silver Street
Brackenfell
Cape Town