

INDUSTRIAL VALVE & ENGINEERING SUPPLIES VALVE & ENGINEERING MERCHANT COMPANY

BMC
VALVE

Break Away
Brand Valves

FIG 7520FFFSRL Flanged Diaphragm Valve CI Soft Rubber Lined , Full Flow



DIMENSIONS							APPROX WEIGHT
DN	A	B	C	D	E	T	KGS
50	190	200	3	120	165	20	11.5
65	216	250	3	182	185	20	16.5
80	254	250	3	227	200	22	24.7
100	305	355	5	271	220	24	36.8
125	356	360	5	375	250	26	54.5
150	406	530	5	375	285	26	87.3


TEST PRESSURE		
SIZES	BODY	SEAT
50MM - 100MM	15KG/CM2	10KG/CM2
125MM - 150MM	10KG/CM2	07KG/CM2
DURATION: 1 MINUTE		

MATERIAL SPECIFICATION		
SN.	COMPONENT	MATERIAL
1	BODY	CAST IRON CASTING- GG25
2	LINING	SOFT NATURAL RUBBER
3	DIAPHRAGM	SOFT NATURAL RUBBER
4	COMPRESSOR	CAST IRON CASTING- GG25
5	SPINDLE	S.S.410
6	BONNET	CAST IRON CASTING- GG25
7	HANDWHEEL	ABS/DUCTILE - GGG40 *
8	STUD	M.S.
9	INDICATOR	PP
10	FASTENER	M.S.

TECHNICAL DATA

- MFG. STD: BS5156
- MFG. STD: Revised.
BS EN 13397 : 2002.
- INSP & TEST STD: BS: 6755-I
- FLANGED & UNDRILLED
- PRESSURE RATING: PN10
- SPARK TESTING OF
RUBBER LINING AT 10 Kv. AC.
- RUBBER LINING HARDNESS 60-65
IN SHORE 'A'

All Specifications are subject to change without notice

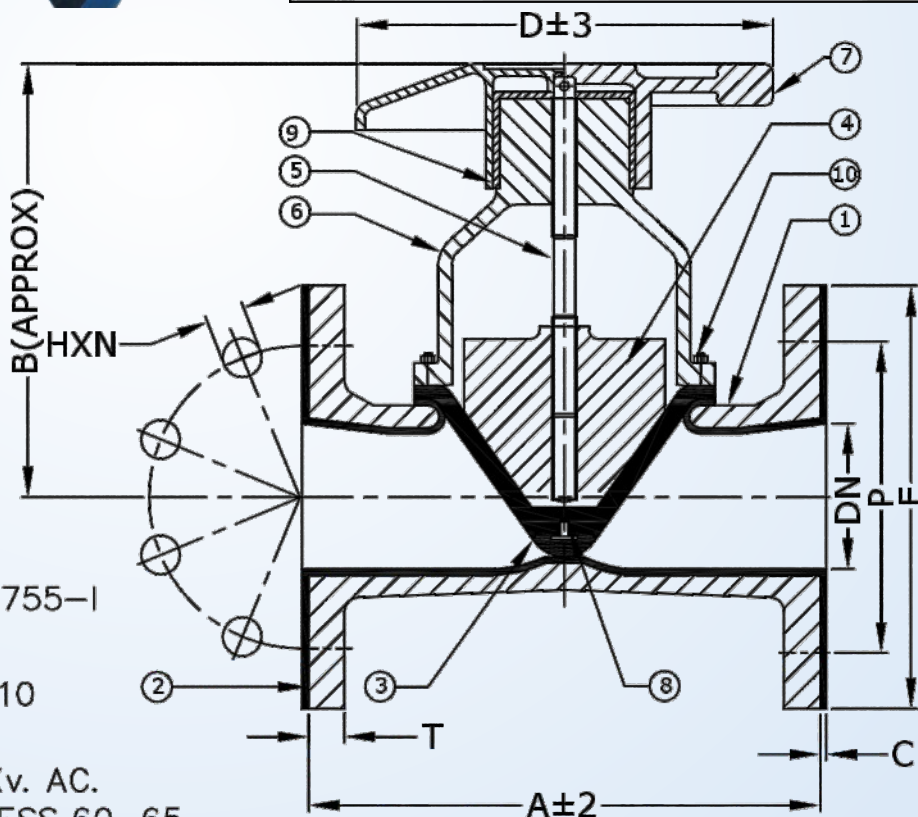

Please Note That Valves Are Undrilled
Can Be drilled Upon Request

Head Office:

+27-11-394-2066 (21 Lines)
sales@industrialvalve.co.za
www.industrialvalve.co.za
114 Plane Road
Spartan
Gauteng
South Africa

KZN Branch:

+27-31-205-0218
laven@industrialvalve.co.za
www.industrialvalve.co.za
Unit No 16 5-29
Eaton Road
Congella
Durban

Cape Town Branch:

+27-21-982-0302
ivesct@industrialvalve.co.za
www.industrialvalve.co.za
Unit 14 Silver Park
Silver Street
Brackenfell
Cape Town