

INDUSTRIAL VALVE & ENGINEERING SUPPLIES VALVE & ENGINEERING MERCHANT COMPANY

BMC
VALVE

Break Away
Brand Valves

FIG 9 BMC CAST IRON GATE VALVE NON RISING SPINDLE

Cast Iron Flanged Industrial Pattern Gate valves, Bronze Taper Wedge Trim

Face to face Dimensions According to BS 3464

Flange OD: to Suit SANS1123/1000, BS4504/10 and BS10 Table D/E


Max Pressure: 16 Bar

Max Temperature: 80 Deg c



Primary Service Pressure Non Shock	Hydrostatic Test Pressure (psi)	
	Shell	Seat
16 Bar	24 Bar	17,6 Bar

No	Name	Material
1	Body	GG25
2	Disc Ring	Bronze
3	Seat Ring	Bronze
4	Stem	Stainless Steel
5	Bonnet	GG25
6	Stuffing Box	GG25
7	Gland	GG25
8	Handwheel	GG25

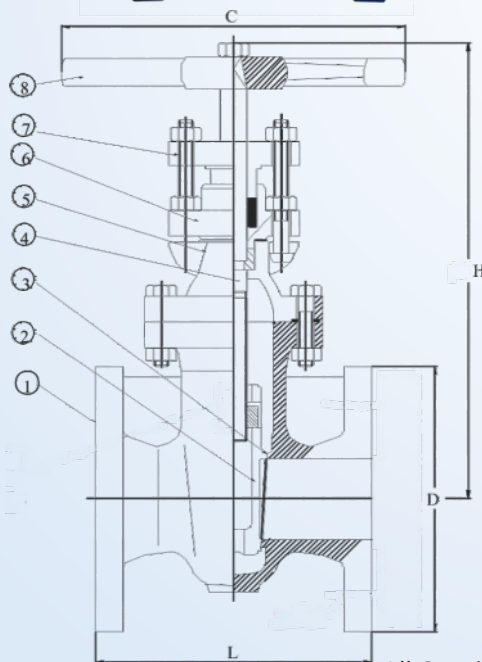

DN	L	D	C	H	Weight Kg
50	146	165	165	290	14
65	159	185	165	310	19
80	165	200	165	340	24
100	172	220	242	370	29
125	190	254	266	455	40
150	210	285	345	470	55
200	241	340	345	620	108
250	273	406	376	725	167
300	305	460	450	775	214

All Specifications are subject to change without notice

Head Office:

+27-11-394-2066 (21 Lines)
sales@industrialvalve.co.za
www.industrialvalve.co.za
114 Plane Road
Spartan
Gauteng
South Africa

KZN Branch:

+27-31-205-0218
laven@industrialvalve.co.za
www.industrialvalve.co.za
Unit No 16 5-29
Eaton Road
Congella
Durban

Cape Town Branch:

+27-21-982-0302
ivesct@industrialvalve.co.za
www.industrialvalve.co.za
Unit 14 Silver Park
Silver Street
Brackenfell
Cape Town