



Branch : Address :

Head Office: 114 Plane Road, Spartan, Gauteng

Durban: Unit 1.5 Canberra Park, Canberra Road, Umbilo

Cape Town: Unit 14 Silver Park, Silver Street, Brackenfell

Tel :

27-11-394-2066(21 lines)

27-31-205-0218

27-21-982-0302

Fax :

27-11-394-2476

27-31-205-0210

27-21-982-0302

E - Mail :

industrialvalve@futurejhb.co.za

iveskzn@futurejhb.co.za

ivesct@industrialvalve.co.za



FIG 2301


BREAKAWAY SAFETY VALVE - HIGH CAPACITY POP TYPE

FEATURES

POP TYPE VALVE
REPLACEABLE STAINLESS STEEL BALL
B.S.P THREADS TO BS 21 TAPER
MANUFACTURED IN SOUTH AFRICA

WORKING PRESSURE (BAR) NON SHOCK

| MAX WORKING PRESSURE NON SHOCK | | HYDROSTATIC TEST PRESSURE | |
|-----------------------------------|-------------------------|------------------------------|--------|
| MAX STEAM | NOT SUITABLE | SHELL | SEAT |
| MAX W.D.G. | 14 BAR @ 0 TO 100 DEG C | 28 BAR | 16 BAR |

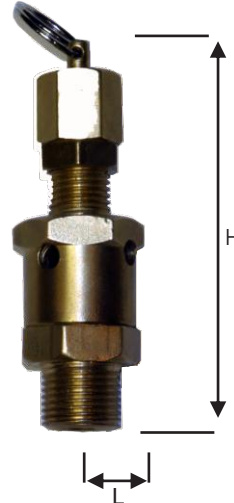

| ITEM | SPECIFICATION |
|-----------------|---------------|
| BODY | BR-BS2872 |
| SEAT | BR-BS2872 |
| CLACK/BALL | SS-GR304 |
| ADJUSTING SCREW | BR-BS2872 |
| LOCK NUT | BR-BS2872 |
| SPINDLES | BR-BS2872 |
| RING | CHROMED M/S |
| SPRING | SS-GR304 |

| SIZE BSP | L | H | MASS GRAMS |
|-------------|------|----|---------------|
| 8 | 12.5 | 78 | 120 |
| 10 | 12.5 | 78 | 125 |
| 15 | 12.5 | 78 | 140 |

| SPRING RANGE | | |
|--------------|--------|---------------|
| LIGHT | SILVER | 0-200 KPA |
| MEDIUM | GOLD | 100-1000 KPA |
| HEAVY | BLUE | 750-1750 KPA |
| X-HEAVY | RED | 1500-2500 KPA |

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Break Away
VALVES

TECHNOLOGY AT ITS BEST